

Ballast for HID lamps

Lamps:	<i>HS and HI</i>
Wattage:	<i>400W</i>
Voltage/Frequency:	<i>220V / 50Hz</i>
Type:	<i>SM 400 23470</i>

Mounting: *Built-in*

Features: *tw 130*

High vacuum impregnation in poliester resin (class F).

Grade 2, Class C, copper wire.



Img: 230V 50Hz

Made and design in Spain




Ordering codes

Code	Model	Cut-out	Diag	Recommended ignitors
440225000	HSI-SAPI 400/22	No	1	IG-051-2
440225100	HSI-SAPI 400/22-P	Yes	1	IG-051-2
340225000	SAPI-HSI 400/22	No	1,2	IG-051-2 / IG-022DiC(DC)
340225100	SAPI-HSI 400/22-P	Yes	1,2	IG-051-2 / IG-022DiC(DC)

Technical data


W	A	Lamp	P.F.	DT	Cp(μF)	Cert.	EEL	kg	pc,s/box
400	4,45	HI, HS	0,45	70	45/50	1, 2, 3	A2	3,97	4

Dimensions

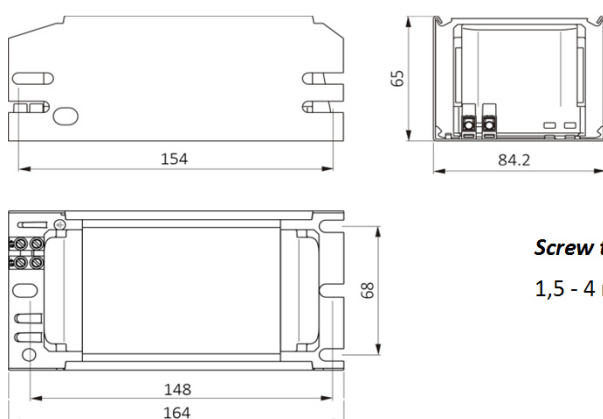

Screw terminals:
1,5 - 4 mm²

Diagrams

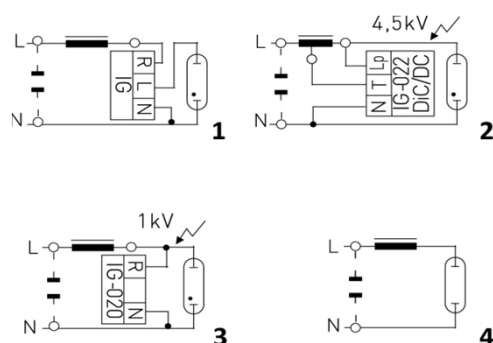

Standards

EN61347-1	General and Safety requirements
EN61347-2-8	Particular Safety requirements
EN60921	Performance requirements